




KYOK BEARING LTD

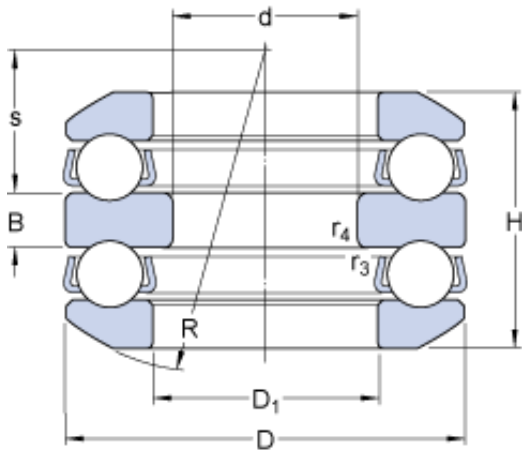

70 mm x 150 mm x 19 mm skf 54317 + U 317
Thrust ball bearings, double direction

Bearing No. 54317 + U 317

54317 + U 317 Bearing 2D drawings and 3D CAD models

| | |
|---|----------------|
| Size | 150x70x95.2 mm |
| Bore Diameter | 150 mm |
| Outer Diameter | 70 mm |
| Width | 95,2 mm |
| d | 70 mm |
| D | 150 mm |
| H | 95.2 mm |
| H ₁ | 105 mm |
| D ₁ | 88 mm |
| D ₂ | 115 mm |
| D ₃ | 155 mm |
| B | 19 mm |
| C | 17.5 mm |
| R | 112 mm |
| s | 39 mm |
| r _{1,2} - min. | 1.5 mm |
| r _{3,4} - min. | 1 mm |
| d _a | 85 mm |
| D _a - max. | 115 mm |
| r _a - max. | 1.5 mm |
| r _b - max. | 1 mm |
| Basic dynamic load rating - C | 174 kN |
| Basic static load rating - C ₀ | 405 kN |
| Fatigue load limit - P _u | 14 kN |



KYOK BEARING LTD

| | |
|---|------------|
| Reference speed | 1100 r/min |
| Limiting speed | 1500 r/min |
| Minimum load factor - A | 1.1 |
| H_1 | 105 mm |
| D_1 | 88 mm |
| D_2 | 115 mm |
| D_3 | 155 mm |
| $r_{1,2}$ min. | 1.5 mm |
| $r_{3,4}$ min. | 1 mm |
| d_a | 85 mm |
| D_a max. | 115 mm |
| r_a max. | 1.5 mm |
| r_b max. | 1 mm |
| Basic dynamic load rating C | 174 kN |
| Basic static load rating C_0 | 405 kN |
| Fatigue load limit P_u | 14 kN |
| Minimum load factor A | 1.1 |
| Mass bearing (including seat washer where applicable) | 7.95 kg |